



BOSTIK

FLOOR, WALL, SEALING AND BONDING SYSTEMS



ELIMINATE THE GUESSWORK IN EVERY INSTALLATION.

From surface prep to finished product, Bostik offers best-in-class systems and expert support to ensure your installations stand the test of time.

Every successful project earns trust in your operation. That's why Bostik installation solutions are designed to help you confidently and consistently deliver flawless results.

Designed as contractor-friendly systems, our surface prep, adhesives, sealing and bonding products work together to simplify complex installs of resilient flooring, hardwood, tile and more. Seamless compatibility between our products helps you avoid costly rework and keep projects on time and on spec. If questions arise, we're here to support your whole crew with direct access to technical experts, on-demand training, and reliable warranties.

4

SURFACE PREPARATION

Create the ideal foundation for flawless flooring with surface prep solutions that level, prime, and protect—delivering long-term performance.

- PRIMERS
- MOISTURE VAPOR BARRIERS
- SELF-LEVELING UNDERLAYMENTS
- PATCH & SKIMCOATS

12

HARDWOOD PRODUCTS

Deliver superior bonding, moisture protection, and sound control with solutions designed for fast installs, fewer callbacks, and lasting beauty.

- MS ADHESIVES
- POLYURETHANE ADHESIVES
- GLUE ASSIST

18

RESILIENT FLOORING

Tackle vinyl, rubber, and composite installs with resilient systems that flex to your project's needs and deliver reliable bonds.

- PRESSURE SENSITIVE ADHESIVES
- FIRM SET ADHESIVES
- TRANSITIONAL ADHESIVES
- RESILIENT WALL & COVE BASE ADHESIVES



Backed by our global R&D capabilities and proven through rigorous internal and third-party testing, each of our products is formulated with best-in-class science to deliver the durability, strength, and resilience professionals have come to rely on. You've built your reputation on a job well done. We've built ours on providing everything you need to deliver it.

24

TILE AND STONE

Achieve a precise, professional finish with mortars, grouts, and mastics designed for timeless beauty, even in demanding environments.

- WATERPROOFING / CRACK ISOLATION MEMBRANES
- GROUTS
- MORTARS & THIN SETS
- MASTICS
- SPECIALTY

32

SEALING AND BONDING

Seal and bond with confidence using easy-to-apply, durable solutions that deliver flexible finishing details that last.

- SEALANTS
- SPECIALTY
- POLYURETHANES
- HYBRIDS
- ACRYLICS
- SILICONES
- FOAM SOLUTIONS

38

SUPPORT SERVICES

Find the tools, training, and support you need to tackle every job with confidence and maximize products for time-tested performance.



PRIMERS | MOISTURE VAPOR BARRIERS | SELF-LEVELING UNDERLAYMENTS | REPAIR PATCHES

SURFACE PREPARATION FOR FLAWLESS INSTALLATION.

A polished, professional finish depends on careful preparation. Our surface preparation systems help you quickly and reliably create the perfect canvas for any flooring install, to meet your specs and exceed your clients' expectations.

From primers and self-levelers to vapor barriers and waterproof membranes, our easy-to-use, fast-setting systems have been scientifically formulated to help you move confidently to the next stage, while minimizing the risk of rework down the road—especially when used with other Bostik installation solutions. Each of our surface preparation solutions is backed by a 3-year warranty which may be increased if used in combination with other Bostik products*.

*For full warranty details, visit bit.ly/BostikWarranty

PRIMERS

Create a strong, reliable bond between challenging substrates and prep products or adhesives—ensuring product compatibility and supporting faster installs.



Universal Primer™ Pro

- VERSATILE AND EASY TO APPLY
- SUPERIOR PENETRATION AND ADHESION
- LOW ODOR, LOW VOC AND FAST DRYING

Achieve a tenacious bond for enhanced adhesive performance with our deep-penetrating interior acrylic primer.



TOTALPrime™

- TEXTURED, BOND-PROMOTING SURFACE
- EASY TO USE
- FAST-SETTING, HIGH-GRIP PERFORMANCE

Delivers superior mechanical adhesion for interior walls and floors, bonding powerfully to the most challenging substrates like epoxy coating and existing tile, eliminating the need for grinding or scarification.

NOTES

SCAN FOR ADDITIONAL
INFORMATION



MOISTURE VAPOR BARRIERS

Protect flooring from costly moisture-vapor related failures and accelerate project timelines with easy-to-apply vapor barrier systems.

HYTEC A900 PREMIUM™

- SPEED, SIMPLICITY & COMPLIANCE
- SUPERIOR PERFORMANCE
- ULTIMATE VERSATILITY

A high-performance, single-component, water-based moisture vapor barrier and primer engineered for unlimited moisture vapor protection of resilient flooring installs. ASTM F3513-24 Compliant.



Roll-Cote™

- ONE-COMPONENT MEMBRANE AND PRIMER
- WIDE SUBSTRATE COMPATIBILITY
- LOW ODOR AND DURABLE FINISH

Simplifies surface preparation by combining moisture mitigation, alkalinity blocking and floor priming into a single, easy-to-apply solution that accelerates hardwood installations.



SELF-LEVELING UNDERLAYMENTS

Deliver smooth, even surfaces with speed and precision with versatile solutions that reduce prep time and ensure lasting performance.

SL-200™

- ULTRA-FLUID, SELF-SMOOTHING FORMULA
- NO PATCHING REQUIRED
- INSTALL FLOOR COVERING 6-16 HOURS

Breakthrough formulation flows effortlessly to fill concrete imperfections—no patching required. Extended open time and superior flow rate make it easy for a single installer to achieve flawless results.



SL-175™

NEW FORMULA WITH FASTER FLOW & SMOOTH FINISH

- HIGH STRENGTH AND LONG-TERM DURABILITY
- 2-IN-1 PERFORMANCE AS SLU AND WEAR LAYER
- EXCELLENT FLOW FOR EASY INSTALLS

Cement-based self-leveling underlayment and wear layer that's walkable in just 1-2 hours, ideal for time-sensitive, high-traffic environments. Designed for performance and versatility, it is stainable and mold- and mildew-resistant.



SL-100™

- VERSATILE USE
- VARIABLE DEPTH APPLICATION
- INSTALL FLOOR COVERING IN 2-3 DAYS

Creates a smooth, level surface for fast installation. Feather-edge capability makes it easy to match existing elevations and doorways, perfect for projects that demand value and performance.

REPAIR PATCHES

Repair damaged or uneven substrates quickly and confidently with high-performance patches, formulated to get your floors installation-ready, fast.

UltraFinish™ Pro

- **START FLOORING IN 15-30 MINUTES**
- **EXCELLENT LEVELING AND VERSATILITY**
- **22% RECYCLED CONTENT**

Our ultimate trowelable, versatile and fast-setting portland cement skim coat and repair patch that sets in minutes, helping accelerate installations.



Webcrete® 95

- **VERSATILE AND RAPID SETTING**
- **HIGH COMPRESSIVE STRENGTH**
- **ENHANCED PERFORMANCE WITH BOSTIK 425™**

High-performance, fast-setting patch and skim coat designed to streamline surface preparation—delivering a smooth, feather-edge finish with speed and versatility.




RENO C200 PRO

- **FAST DRYING**
- **EFFORTLESS APPLICATION AND HIGH FLOW**
- **VERSATILE AND ENVIRONMENTALLY FRIENDLY**

High-performance, rapid-drying, cement-based skimcoat and screed delivers professional-grade surface preparation for interior floors—ready for flooring in as little as one hour.



INSTALLATION SYSTEM

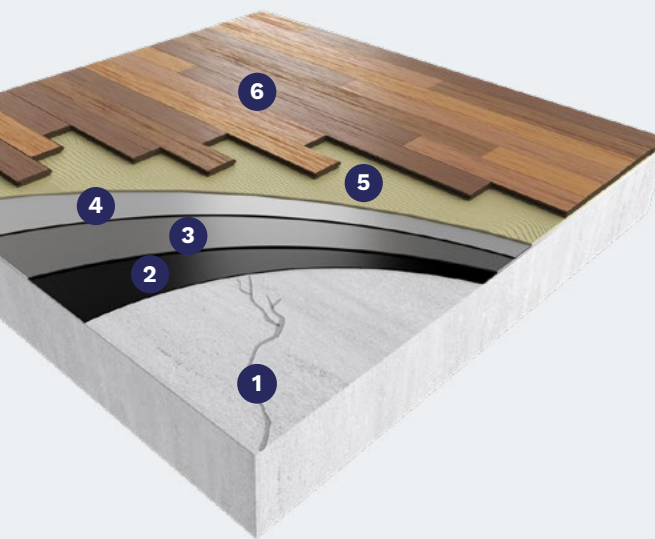

BOSTIK'S SYSTEM SOLUTION

1. CONCRETE SLAB
2. MOISTURE VAPOR MEMBRANE
3. SELF-LEVELING UNDERLAYMENT
4. SKIMCOAT PATCH
5. HARDWOOD FLOORING ADHESIVE
6. HARDWOOD FLOORING

STEP 1

ROLL-COTE™

Water-based, one-component system designed to reduce substrate moisture-vapor emissions, prime floors before underlayment application, and block concrete alkalinity.



STEP 2

ULTRA FINISH™ PRO

Cement-based, rapid-drying, trowelable repair patch and skimcoat designed to smooth subfloors before the installation of finished floor coverings, enabling the installation of various floor coverings in as little as 15 minutes.



STEP 3

PRO-MSP™

The tough, flexible adhesive with sound reduction membrane and moderate moisture vapor control that's easy to use for durable wood flooring installations



SELF-LEVELING UNDERLAYMENTS

	SL-200™	SL-175™	SL-100™	SL-GYP™	SL-RAPID™	SL-250™ LIGHT
APPLICATION CHARACTERISTICS						
Thickness	1/8"–1"	1/8"–2"	1/4"–3"	1/4"–2"	1/8"–1"	1/4"–2"
Extended Depth with Aggregate	-	5"	5"	-	-	-
Walkable	2–3 hrs	1–2 hrs	2–3 hrs	3–4 hrs	< 1 hr	2–3 hrs
Healing Time	45 min	20 min	20 min	20 min	20 min	25 min
Flow Cup (After 10 minutes)	16.3 cm	14.5 cm	13.5 cm	13.8 cm	15.5 cm	16 cm
Install Hardwood Floor Coverings	16 hrs	16 hrs	2 days	2 days	4 hrs	2 days
Install Tile & Stone Floor Coverings	6 hrs	6 hrs	2 days	2 days	1 hr	1 days
Install Resilient Floor Coverings	16 hrs	12 hrs	2 days	2 days	4 hrs	2 days
Wear Layer	-	●	-	-	-	-
Stainable	-	●	-	-	-	-
Light Weight Applications	-	-	-	-	-	●
Moisture Limit	No limit	No Limit	No Limit	3 lb / 75% RH	No Limit	No Limit
Pumpable	●	●	●	●	-	●
Final Set	90 min	60 min	90 min	60 min	40 min	60 min
Chemistry	Cement	Cement	Cement	Hybrid Gypsum	Cement	Cement
Mold & Mildew Resistant	●	●	●	N/A	●	●
Recycled Content	-	-	-	-	-	-
Compressive Strength (28 days ASTM C109)	5,500 psi	5,500 psi	5,000 psi	5,000 psi	5,500 psi	4,500 psi
Flexural Strength (ASTM C348)	1,000 psi	1,100 psi	1,000 psi	1,500 psi	1,200 psi	> 1,000 psi
Exterior Use	-	-	-	-	-	-

MOISTURE VAPOR BARRIERS

	SLAB-COTE™	HYTEC A900 PREMIUM™
Chemistry Type	Epoxy	Water-based
Components	2-part	1-part
Application	Single coat, roller/squeegee	2-coat, roller
Moisture Vapor Protection	< 25 lbs, 100% RH	< 25 lbs, 100% RH
Recoat Time	6–8 hrs (if needed)	30–60 min
Ready to Install Flooring	12 hrs	30–60 min after second coat
Substrates	Concrete, Cement Terrazzo	Concrete
VOC	0	0

PATCHES

ULTRAFINISH™ PRO		WEBCRETE® 95		RENO C200 PRO		ULTRARAMP™		WEBPATCH® D-9001	
Skim	Max 1/2"	Skim	Max 1/2"	Skim	Max 1/2"	Skim	Max 2"-5"*	Skim	Max 1/2"
-	-	-	-	-	-	-	-	-	-
15 min	30 min	25 min	35 min	30 min	30 min	30 min	30 min	25 min	35 min
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
30 min	16 hrs	4 hrs	8 hrs	3 hrs	4 hrs	4 hrs	16 hrs	N/A	
15 min	30 min	2 hrs	4 hrs			1 hr	1 hr	N/A	
15 min	30 min	4 hrs	8 hrs	1 hr	1 hr	1 hr	1 hr	2 hrs	4 hrs
-	-	-	-	-	-	•	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
No Limit		No Limit		No Limit		No Limit		3 lb / 75% RH	
-	-	-	-	-	-	-	-	-	-
15 min	30 min	25 min	35 min	20 min	30 min	30 min	30 min	25 min	35 min
Cement		Cement		Cement		Cement		Gypsum	
•	-	•	-	•	-	•	-	•	-
•	-	-	-	-	-	•	-	-	-
3,500 psi		3,500 psi		4,500 psi		4,500 psi			
						>1,200 psi			
-	-	-	-	-	-	•	-	-	-

*2" neat, 5" with aggregate

MOISTURE VAPOR BARRIERS

ROLL-COTE™	MVP4®
Water-based	Polyurethane
1-part	1-part
1-2 coats, roller	1 coat, trowel
Unlimited for hardwood, tile, and stone, up to 95% for resilient	Unlimited for hardwood installations
2 hours	N/A
1 Coat: 30 min, 2 Coats: 2 hrs	12-16 hrs
Concrete, terrazzo, OSB, plywood, high-performance subflooring panels	Concrete, Cement Patch
< 15 g/L	< 73 g/L



FULL GLUE DOWN: MS | FULL GLUE DOWN: POLYURETHANE | GLUE ASSIST

COMPLETE HARDWOOD INSTALLATIONS WITH ZERO HESITATION.

Flawless hardwood installations begin long before the first plank is set—and we're here to support you from the start. Our comprehensive hardwood systems' seamless compatibility and superior patented technology simplify the prep and placement of hardwood flooring to keep your projects moving and your clients impressed.

With qualities like strong adhesion, built-in sound reduction, and vapor protection, our easy-to-use, full-system approach helps you deliver beautiful, lasting results, backed by lifetime warranties* and expert service.

*When used with compatible Bostik adhesive solutions on approved substrates. For full warranty details, visit bit.ly/BostikWarranty

MS ADHESIVES

Simplify hardwood installations with strong initial grab, long-term flexibility, and full-system confidence under every plank.

ULTRA-SET® SINGLESTEP2™

- UNLIMITED MOISTURE VAPOR MEMBRANE WITH UP-TO LIFETIME WARRANTY
- BEST-IN-CLASS SOUND REDUCTION
- PROPRIETARY BONDING

Best-in-class hardwood adhesive with Thickness Control™ spacer technology to ensure your moisture vapor and sound reduction membranes surpass expectations.



GREENFORCE®

- BEST-IN-CLASS RIDGE RETENTION
- ULTIMATE TRIPLE PROTECTION: BLOCKS VAPOR, SOUND, AND BACTERIA
- VERSATILE AND EASY TO CLEAN

Advanced Tri-Linking™ adhesive, moisture vapor membrane, and sound-reduction membrane in one.



Pro-MSP™

- MOISTURE VAPOR MEMBRANE AND SOUND REDUCTION
- EASY TO SPREAD, EASY TO CLEAN
- LOW ODOR AND VOC

Tough, flexible, and easy-to-use adhesive for durable wood flooring installations, offering sound-reduction and moderate moisture vapor control.

SCAN FOR ADDITIONAL
INFORMATION



PU ADHESIVES

Secure hardwood flooring with confidence while achieving best-in-class sound and vapor control.

Vapor-Lock™

- BEST-IN-CLASS SOUND REDUCTION
- THICKNESS CONTROL™ SPACER TECHNOLOGY
- UNLIMITED MOISTURE VAPOR MEMBRANE FOR HARDWOOD FLOORS

Urethane adhesive engineered for unbeatable moisture vapor protection and sound reduction, to keep floors quiet, secure, and solid, even in the toughest conditions.



Builder's Block™

- ALL-IN-ONE MOISTURE VAPOR CONTROL
- HIGH-PERFORMANCE BONDING
- BUILDER-GRADE URETHANE ADHESIVE

Builder-grade urethane adhesive built to perform on any job, big or small, with unlimited moisture vapor control.



WOOD P212 BOND™

- EASY APPLICATION
- MODERATE MOISTURE VAPOR CONTROL
- RELIABLE BOND STRENGTH

Reliable, easy-to-apply urethane adhesive with moderate moisture vapor protection, designed to keep hardwood floors firmly in place with lasting strength.

GLUE ASSIST SOLUTIONS

The NWFA (National Wood Flooring Association) guidelines recommend that a glue-assist installation enhances stability and security, especially for wide-plank hardwood, by combining mechanical fasteners with adhesive to reduce movement, and squeaks, providing long-term performance and customer satisfaction.



- AVOID SQUEAKS
- REDUCED CALLBACKS
- EASY TO GUN



GLUE ASSIST PRODUCTS

Enhance nail-down performance for firmer, quieter hardwood flooring installations that last.

PRO-MSP™ Sausages

- SOUND REDUCTION
- EASY TO SPREAD, EASY TO CLEAN
- LOW ODOR AND VOC

Versatile hardwood and bamboo adhesive. Ideal for glue-assist applications with mechanical fasteners on wood subfloors.



MS

POLYURETHANE

	ULTRA-SET® SINGLESTEP	GREENFORCE®	PRO-MSP™	VAPOR-LOCK™	BOSTIK'S BEST®
PRODUCT TRAIT					
Moisture Limits (Max MVER) CaCl/RH%	Unlimited	Unlimited	15 lb / 87% RH	Unlimited*	Unlimited**
Sound Abatement (IIC/STC)	70/67	67/61	64/61	69/66	-
Ease of Troweling	Excellent	Excellent	Easy	Moderate	Moderate
Initial Green Grab	Strong	Good	Moderate	Strong	Good
Working Time in Minutes	60 min	60 min	60 min	90 min	60 min
Cure Time in Hours (Light Traffic/Full Cure)	8–12 hrs / 12–24 hrs	8–12 hrs / 12–24 hrs	6–8 hrs / 12–24 hrs	6–8 hrs / 12–16 hrs	6–8 hrs/ 12–24 hrs
Final Bond Strength	Strong	Strong	Moderate	Moderate	Strong
VOCs	0 g/L	0 g/L	8 g/L	0 g/L	20 g/L
Recycled Content	1%	-	-	1%	-

*Engineered & Solid Hardwood Only

**Engineered Wood Only

ACRYLIC

BUILDER'S BLOCK™	EFA+™	WOOD P212 BOND™	PRO-CURE™	WOOD-TACK™
Unlimited	15 lb / 87% RH	12 lb / 85% RH	3 lb / 75% RH	3 lb / 75% RH
-	-	-	-	-
Moderate	Easy	Easy	Moderate	Excellent
Strong	Moderate	Strong	Moderate	Good
90 min	60 min	60 min		60 min
6–8 hrs / 8–12 hrs	6–8 hrs / 8–12 hrs	6–8 hrs / 12–24 hrs	8–10 hrs / 24 hrs (open time 100 mins)	24 / 72 hrs
Moderate	Moderate	Moderate	Moderate	Good
20 g/L	25 g/L	< 20 g/L	25 g/L	10 g/L
-	-	-	-	-

NOTES



ACHIEVE FLEXIBLE PERFORMANCE FOR RESILIENT FLOORING.

When the job demands flexibility, our systems are here to accommodate your project needs. Our start-to-finish resilient flooring systems offer reliable bonding and flexible working times paired with expert service and support—so your team can tackle vinyl, composite, carpet tile, or rubber floor projects with confidence.

Formulated for antimicrobial protection and superior moisture tolerance, using our full systems reduces the risk of adhesion failure, curling or mold growth to get your project done right. And backed by warranties up to 25 years*, our systems guarantee satisfaction for decades to come.

PRESSURE-SENSITIVE ADHESIVES

LOCK A699 PSA™

- OUTSTANDING STRENGTH AND TACK
- HIGH MOISTURE RESISTANT PSA
- IMMEDIATE RETURN TO SERVICE

This advanced, pressure-sensitive acrylic formula combines outstanding bond strength and tack with superior workability and high moisture resistance. With immediate return to service, it's engineered for professionals who demand the highest performance.



LOCK A499 PSA™

- PERMANENT, AGGRESSIVE TACK
- EXCELLENT VERSATILITY OF USE
- RESISTS MOISTURE VAPOR & ALKALI

High-performance, pressure-sensitive acrylic adhesive designed for superior bond strength and effortless application.



LOCK A299 PSA™

- VALUE-DRIVEN ADHESIVE FORMULA
- STRONG BONDS AND VAPOR RESISTANCE
- EASY TROWELABILITY AND CLEANUP

Dependable resilient flooring adhesive offering moisture vapor and alkali resistance.

SCAN FOR ADDITIONAL
INFORMATION



SPECIALTY

Bostik delivers high-performance solutions for the toughest resilient/soft-flooring challenges—helping installers work faster, smarter, and with total confidence. Engineered to solve real-world jobsite issues like low adhesion, difficult substrates, and demanding environments, this portfolio goes beyond traditional adhesives to provide standout performance, versatility, and reliability. From next-generation hybrid technologies to advanced surface preparation systems, Bostik products give professionals the edge they need on every project.

LOCK H899 OPTIMUM™

- UNMATCHED BOND PERFORMANCE
- ULTIMATE VERSATILITY
- FAST-TRACK INSTALLATION

LOCK H899 OPTIMUM™ is a next-generation, one-component hybrid adhesive engineered for maximum performance, speed, and versatility—making it the go-to solution for resilient flooring even in the most demanding environments.

TOUGH JOB – SIMPLE SOLUTION.




COTE A985 ENCAPSULATOR™

- BLOCKS SOURCES OF LOW ADHESION
- PLATICIZER MIGRATION PROTECTION
- EXCELLENT SUBSTRATE VERSATILITY

Overcome old cutback stains and adhesive residues! This superior formulation isolates problems, and protects against plasticizer migration. Encapsulates residual cutback stains and pressure-sensitive adhesive remnants, preventing interference with new adhesive bonds.



COMPLETE RESILIENT FLOORING SYSTEM

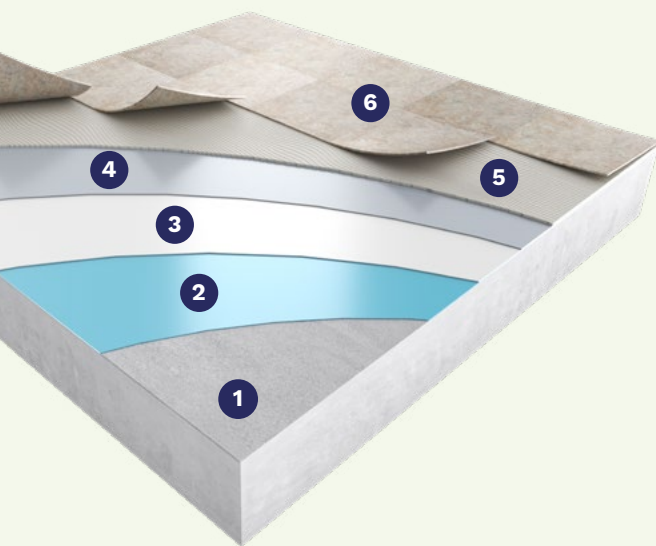

BOSTIK'S SYSTEM SOLUTION

1. CONCRETE
2. MOISTURE VAPOR BARRIER
3. SELF LEVELING UNDERLAYMENT
4. SKIMCOAT PATCH
5. SOFT FLOORING ADHESIVE
6. SOFT FLOORING

STEP 1

HYTEC A900 PREMIUM™

High-performance, single-component, water-based moisture vapor barrier and primer engineered for unlimited moisture vapor protection.



STEP 2

SL-200™

Ultra-fluid, self-smoothing underlayment designed for the preparation of finished floor coverings.



STEP 3

LOCK A499 PSA™

High-performance, pressure-sensitive acrylic adhesive designed for superior bond strength and effortless application. Excellent trowelability, low odor, easy cleanup, and enhanced moisture vapor resistance combine with a rapid, heavy-duty grip to offer a more efficient installation.



	PRESSURE SENSITIVE			TRANSITIONAL	FIRM SET	VINYL COMPOSITE TILE
	LOCK A699 PSA™	LOCK A499 PSA™	LOCK A299 PSA™	LOCK A799 TRANSITIONAL™	LOCK A490 LVT™	LOCK A195 VCT™
PRODUCT TRAIT						
Product Type	Pressure Sensitive Acrylic	Pressure Sensitive Acrylic	Pressure Sensitive Acrylic	Transitional-Firm Set Acrylic	Firm-Set Acrylic	Pressure Sensitive Acrylic
Moisture Limits	99% RH	99% RH	99% RH	99% RH	90% RH	95% RH
Tack Level	Extremely High	High	Good	High	Good	Good
Bond Strength (@ 24 hrs)	High	High	Good	High	High	Good
Working Time	4 hrs	4 hrs	4 hrs	6 hrs	4 hrs	16 hrs
Return to Light Foot Traffic	Immediate	24 hrs	24 hrs	24 hrs	24 hrs	24 hrs
Return to Normal Use	Immediate	24 hrs	24 hrs	24 hrs	24 hrs	48 hrs
Rolling Load Resistance	High	Moderate	Low	High	High	High
Suitable for Outdoor Use	-	-	-	-	-	-
Suitable for Wet Areas	-	-	-	-	-	-
RECOMMENDED FLOORING TYPES						
LVT/LVP	●	●	●	●	●	
VCT	●	●	●	●		●
Sheet Vinyl	●	●	●	●	●	
Carpet Tile	●	●	●	●		
PVC Backings				●		
Olefin-Backed Vinyl		●	●	●		
Carpet & Pad						
Broadloom Carpet						
Crumb Rubber	●	●				
Rubber Sheet/Tile						
Exterior Carpet						
Cork	●			●		

MULTI-PURPOSE		COVEBASE	RUBBER	SPECIALTY			
LOCK A285 MP™	LOCK A485 MP™	LOCK A100 COVE™	LOCK P799 I/O RUBBER™	LOCK A495 AERO™	LOCK H899 OPTIMUM™	COTE A985 ENCAPSULATOR™	COTE A985 GYP™
Firm-Set Acrylic	Firm-Set Acrylic	Firm-Set Acrylic	Moisture-Cure Polyurethane	Aerosol Pressure Sensitive Acrylic	Modified Silane Polymer	Acrylic Polymer Compound	Acrylic Floor Primer
85% RH	85% RH	N/A	99% RH	95% RH	100% RH	85% RH	85% RH
N/A	N/A	N/A	N/A	Good	N/A		
Good	Good	High	Extremely High	High	Extremely High		
20–30 min	15–25 min	20–30 min	30–40 min	2 hrs	60–90 min		
24 hrs	24 hrs	8–12 hrs	8–10 hrs	Immediate	3 hrs		
72 hrs	72 hrs	8–12 hrs	24 hrs	Immediate	8 hrs		
Moderate	High	N/A	High	High	High		
-	-	-	●	-	●*		
-	-	-	●	-	●		
		●**	●	●	●		
●				●	●		
				●	●		
				●			
					●		
●	●						
●	●						
			●		●		
			●		●		
			●		●**		
●	●				●		

*If covered

** Wall Applicaitons



GROUTS | MORTARS | MASTICS | SPECIALTY

DELIVER TIMELESS AND TIME-TESTED TILE INSTALLATIONS.

Precision is everything in tiling projects. That's why our tiling systems have been formulated with best-in-class science to keep you in control of your project at every step and protect the final beauty of your results—with warranties up to 25 years*.

With easy-to-work formulas, advanced crack isolation and stain resistance, our comprehensive systems and technical support help eliminate the most common tile failures and keep your clients satisfied for years to come.

*When used with compatible Bostik adhesive solutions on approved substrates. For full warranty details, visit bit.ly/BostikWarranty

GROUTS

Finish strong with high-performance grouts that deliver flawless color, lasting durability, and fast, easy cleanup.

Dimension® with EzClean Technology

- RADIANT, HIGH-END LOOK
- EASY TO CLEAN AND INSTALL
- CRAFTED FOR LASTING PERFORMANCE

Creates a unique, reflective finish with tile or stone, adding a touch of elegance to any project.



TruColor® with EzClean Technology

- EASY TO CLEAN AND INSTALL
- INNOVATIVE TECHNOLOGIES
- ENGINEERED FOR RESULTS

Delivers flawless color and unmatched durability.



Hydroment® Vivid™

- EASE OF APPLICATION AND CLEAN UP
- FIBER REINFORCED AND DURABLE
- SUPERIOR COLOR RETENTION AND STAIN RESISTANCE

Rapid-curing, high-performance grout that delivers long-lasting results and easy cleanup for a flawless finish.

SCAN FOR ADDITIONAL
INFORMATION



MORTARS AND THIN SETS

Set tile with strength and precision using mortars engineered for heavy loads, large formats, and challenging surfaces.

BAM™

- FIBER REINFORCED FOR SUPERIOR STRENGTH
- IDEAL FOR OVERSIZED AND HEAVY TILE
- EXTENDED POT LIFE, GROUT IN 4 HOURS

High-performance mortar built for large and heavy tile, offering industry-leading strength, extended open time, and exceptional efficiency.



Big Tile & Stone™

- VERTICAL SAG RESISTANCE
- ENGINEERED TO REDUCE TILE LIPPAGE
- ACCOMMODATES UNEVEN TILE AND STONE

Heavy-duty mortar designed to minimize lippage while providing support and leveling for large and heavy tile installations.



Tile-Mate® Premium™

- FOR MOST AREAS AND SURFACES
- UNIQUE, HIGH-PERFORMANCE BLEND
- BOOST TO ANSI A118.4 & A118.11 WHEN MIXED WITH BOSTIK 425

Dependable, all-surface thin set for most surfaces, delivering superior bond strength.

SCAN FOR ADDITIONAL
INFORMATION



MASTICS

Simplify interior tile installs with mastics that offer dependable grab, smooth application, and strong adhesion across a range of surfaces.

D-2001® ULTRA-PREMIUM™ Mastic

- FAST, PROFESSIONAL INSTALLATION
- IDEAL FOR LARGE FORMAT TILES
- VERSATILE SUBSTRATE COMPATIBILITY

Delivers superior adhesion and ease of use for interior ceramic and stone tile installations.



MULTI-PURPOSE™ Floor & Wall Mastic

- STRONG INITIAL TACK
- RELIABLE FOR STANDARD CERAMIC TILE SIZES
- SMOOTH, CONSISTENT COVERAGE

Offers excellent performance and versatility for everyday ceramic tile installations.



PROFESSIONAL GRADE™ Ceramic Tile Mastic

- COST-EFFECTIVE ADHESIVE SOLUTION
- IDEAL FOR LIGHT-DUTY AREAS
- EASY INSTALLATION

Dependable performance for standard interior tile installations.

SPECIALTY

Tackle tough installs with high-performance adhesives engineered for specialty applications.



Ultra-Set® Advanced

- WATERPROOFING & CRACK ISOLATION
- SOUND-CONTROL
- DURABLE, FLEXIBLE PROTECTION

High-performance, all-in-one urethane membrane and adhesive that delivers exceptional waterproofing, crack isolation, and sound reduction.



Bosti-Set®

- RAPID INSTALLATION OF GAUGED PORCELAIN PANELS
- SIMPLIFIED APPLICATION DIRECTLY TO TILE
- ADVANCED POLYMER AND SPACER TECHNOLOGIES

Single-coat, non-sag adhesive that delivers fast, precise placement, strong bonding, and built-in acoustic performance to simplify gauged porcelain panel installation.

NOTES

COMPLETE TILE SYSTEM

STEP 1

UNIVERSAL PRIMER PRO & SL-175™

Self-leveling underlayment creates a smooth, level surface for fast installation.



STEP 2

ULTRA-SET® ADVANCED

Tenacious, one-part, trowel applied, elastomeric waterproofing/crack/sound isolation membrane and setting adhesive.



STEP 3

BIG TILE & STONE™


Polymer-modified, large and heavy tile mortar used for interior or exterior installations to set large format tiles, even on vertical applications.



STEP 4

TRUCOLOR® WITH EZCLEAN TECHNOLOGY

High-performance, glass-filled, water-based pre-mixed grout enhanced with RapidCure™, and patented HXD™ technology, ideal for residential, commercial, and renovation tile projects.

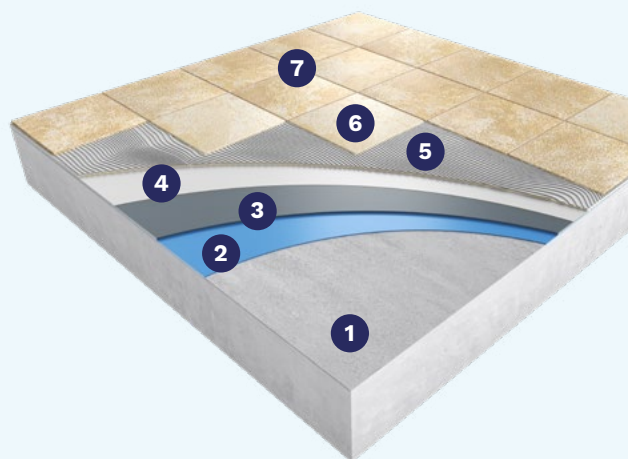

BOSTIK'S SYSTEM SOLUTION

1. CONCRETE SLAB
2. PRIMER
3. SELF-LEVELING UNDERLAYMENT OR PATCH
4. WATERPROOFING AND ANTI-FRACTURE MEMBRANE
5. MORTAR
6. TILE
7. GROUT

MORTARS/THIN SETS

	BAM™	REFLEX®	STONEWALL™	BIG TILE & STONE™	SINGLE-FLEX® FS	SINGLE-FLEX®	LARGE FORMAT FLOOR™	BOSTIK PM™
PRODUCT TRAIT								
ANSI	A118.4, A118.11, A118.15	A118.4, A118.11	A118.4, A118.11	A118.4, A118.11	A118.4, A118.11	A118.4, A118.11	A118.4, A118.11	A118.4, A118.11
Open Time	Up to 30 min	60–80 min	30–40 min	30–45 min	10–15 min	40–50 min	30–40 min	30–40 min
Pot Life	1–2 hrs	1–2 hrs	3 hrs	3.5 hrs	45 min	3.5 hrs	2.5 hrs	2.5 hrs
Time to Grout	4 hrs	10–15 hrs	10–15 hrs	10–15 hrs	1.5 hrs	10–15 hrs	10–15 hrs	10–15 hrs
Fast Setting	•				•			
Polymer Modified	•	•	•	•	•	•	•	•
Porcelain Tile Shear Strength (28 day)	700 psi	575 psi	575 psi	375 psi	575 psi	450 psi	400 psi	400 psi
Glazed Wall Shear Strength (28 day)	550 psi	560 psi		580 psi	560 psi	450 psi	325 psi	440 psi
Quarry to Quarry Shear Strength (28 day)	450 psi	425 psi		300 psi	450 psi	440 psi		
Quarry to Plywood Shear Strength (28 day)	250 psi	300 psi	300 psi	250 psi	260 psi	250 psi	300 psi	300 psi
Anti-Sag	•	•	•	•	•	•	•	•
Interior Application	•	•	•	•	•	•	•	•
Exterior Application	•	•	•	•	•	•	•	•
Water Immersion	•							
RECOMMENDED SUBSTRATES								
Plywood	•	•	•	•	•	•	•	•
Concrete	•	•	•	•	•	•	•	•
Gypsum Wallboard	•	•	•	•	•	•	•	•
Cementitious Backer Units	•	•	•	•	•	•	•	•
Ceramic Tile	•	•	•	•	•	•	•	•
Vinyl/VCT Tile	•	•	•	•	•	•	•	•
Waterproof/Uncoupling Membranes	•	•	•	•	•	•	•	•
RECOMMENDED TILE TYPES								
Ceramic	•	•	•	•	•	•	•	•
Porcelian	•	•	•	•	•	•	•	•
Natural Stone	•	•	•	•	•	•	•	•
Large Tile Size	•	•	•	•	•	•	•	•
Glass	•	•						
Mosaic/Joints	•							
GROUT TRAITS								
Joint Width								
Working Time								
Final Set								
Number of Colors								
Grout Sealant Recommended								
Mold & Mildew Resistant								

GROUTS

PORCELAIN-MATE™	DITRA-SET™	TILE-MATE® PREMIUM *W/ADMIX	EZPOXY™ EZCLEAN™	DIMENSION® WITH EZCLEAN TECHNOLOGY	TRUCOLOR® WITH EZCLEAN TECHNOLOGY	HYDROMENT® VIVID™	HYDROMENT DRY TILE	HYDROMENT CERAMIC TILE
A118.4	A118.1, A118.4*, A118.11*	A118.1, A118.4*, A118.11*	A118.3	A118.19	A118.19	A118.7	A118.6	A118.6
20–30 min	20–30 min	20–30 min						
2 hrs	2 hrs	2 hrs	45 min	Reusable up to 2 yrs	Reusable up to 2 yrs	2.5 hrs	1 hr	1 hr
8–10 hrs	8–10 hrs	8–10 hrs						
•		-						
250 psi		470 psi						
300 psi		500 psi						
		400 psi						
•	•	•						
•	•	•						
		•*	•	•	•	•	•	
•	•	•	•	•	•	•	•	
	•	•*	•	•	•	•	•	
•	•	•	•	•	•	•	•	
		•*	•	•	•	•	•	
		•*	•	•	•	•	•	
	•**	•*	•	•	•	•	•	
•	•	•	•	•	•	•	•	•
•	•		•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•		•	•	•	•	•	•
			•	•	•	•	•	•
			1/16"–1/2"	1/16"–1/2"	1/16"–1/2"	1/16"–1/2"	up to 1/8"	1/8" - 1-1/2"
			> 90 min	3 hrs	3 hrs	30 - 40 min	1 hr	1 hr
			16–24 hrs	24 hrs light foot traffic, 3 days water exposure	24 hrs light foot traffic, 3 days water exposure	3–4 hrs	2–3 hrs	2–3 hrs
			35	14	29	35	35	35
			-	-	-	-	•	•
			•	•	•	•	•	•

*When mixed with 425 Multi-Purpose Acrylic Latex Admixture
 **In conjunction with uncoupling and waterproofing membranes



SEALANTS | SPECIALTY

FINISH STRONG WITH PROFESSIONAL SEALANTS AND ADHESIVES

Your final look and your project's longevity all depend on getting the details right. Our easy-to-apply sealing and bonding solutions ensure you finish every job correctly and can rely on lasting results, so that every seam, edge, and joint reflect the same quality you stand for.

Offering durable, flexible performance, and color-matched finishes, our products let you deliver a clean, professional finish and come backed by our application and technical support.



VIEW OUR
COLOR GUIDE



SEALANTS

Seal every edge and bond with confidence using formulas designed for all-weather durability, dynamic movement, and the highest quality standards.

DUO-SIL®

- AVAILABLE IN OVER 80 COLORS
- PAINTABLE AFTER 1-2 HOURS
- MULTI-PURPOSE PERFORMANCE

A versatile, color-matching sealant and adhesive designed for long-lasting flexibility and superior urethane-grade strength—ideal for sealing windows & doors.



DUO-SIL Ultra®

- ALL-WEATHER APPLICATION
- AVAILABLE IN 78 COLORS MATCHED TO LEADING SIDING BRANDS
- HYBRID POLYMER PERFORMANCE WITH $\pm 50\%$ JOINT MOVEMENT ACCOMMODATION

High-performance hybrid polymer sealant and adhesive built for demanding jobs and extreme conditions.



BOSTI-FLEX™ PLUS

- 0 VOC
- EASY TO USE, EASY TO CLEAN
- WIDE-RANGING APPLICATIONS

High-performance, siliconized acrylic latex sealant designed for residential and light commercial projects where flexibility and durability matter.

SCAN FOR ADDITIONAL
INFORMATION



SEALANTS (continued)

915

- MIAMI-DADE CERTIFIED FOR EXTREME WEATHER CONDITIONS
- LONG-LASTING FLEXIBILITY AND MOVEMENT
- STRONG ADHESION

Single-component polyurethane sealant engineered for superior flexibility, extended workability, and long-term durability in all seasons.



915FS™

- PERMANENT FLEXIBILITY
- FAST SETTING
- STRONG ADHESION

915FS sets itself apart with an accelerated skin time, making it ideal for time-sensitive applications.



SEALANTS (continued)



EDUCATION

Hybrid sealants combine advanced polymer technology with superior performance for both interior and exterior projects. Bostik's HYBRI-SIL® delivers an odorless, low-VOC formula that's safe for indoor use while offering exceptional flexibility, all-weather reliability, and strong adhesion to a wide range of materials. For applications where aesthetics matter, HYBRI-SIL® CLEAR provides the same durability in a crystal-clear finish—ideal for roofing, windows, and visible joints. Both options resist cracking, peeling, and shrinkage, ensuring long-lasting seals that withstand extreme temperatures and harsh conditions.

HYBRI-SIL® Clear

- CRYSTAL CLEAR
- TENACIOUS ADHESION
- HIGHLY UV RESISTANT

A crystal-clear hybrid sealant engineered for roofing applications, delivering durable adhesion and long-lasting weather resistance.



HYBRI-SIL®

- ALL WEATHER PERFORMANCE
- LOW-VOC, LEED CONTRIBUTION
- EXCEPTIONAL FLEXIBILITY

Versatile, odorless, and environmentally friendly sealing for interior and exterior applications.



SPECIALTY

Grip N Grab™

- INSTANT GRAB
- SMART AND SIMPLE APPLICATION
- EXTREME HOLDING POWER

The ultimate instant-grab adhesive for tough interior or exterior jobs.



Gutter & Seam Sealer™ Pro

- DESIGNED FOR GUTTERS & EXTERNAL SEAMS
- WATERTIGHT & FLEXIBLE SEAL
- APPLY IN WET CONDITIONS

Professional-grade, hybrid sealant and adhesive, designed to deliver watertight, flexible, and durable seals in gutters, seams, and flashing.



SPECIALTY (continued)

HDCA

- CERTIFIED STRENGTH & RELIABILITY
- IDEAL FOR SPECIALIZED APPLICATIONS
- REDUCES SQUEAKS & MOVEMENTS

A premium-grade, one-component polyurethane adhesive, built for tough construction environments.



POLYURETHANES

HYBRIDS

	915	915FS™	916	HDCA	DUO-SIL ULTRA®	PRO-MS 50™	GRIP N GRAB™	HYBRI-SIL®
PRODUCT IDENTIFICATION								
Product Type	Sealant	Sealant	Sealant	Adhesive	Sealant	Sealant	Adhesive	Dual
Technology	Polyurethane	Polyurethane	Polyurethane	Polyurethane	Polyurethane	Hybrid	Hybrid	Hybrid
Packaging	10.1 oz cartridge 20 oz sausage	10.1 oz cartridge 20 oz sausage	10.1 oz cartridge 20 oz sausage	10.1 oz cartridge 28 oz cartridge	9.5 oz cartridge	9.8 oz cartridge 20 oz sausage	9.5 oz cartridge	9.5 oz cartridge 20 oz sausage
Colors	11	4	3	1	78	12	1	4
PERFORMANCE & FEATURES								
Movement Capability	+/- 35%	+/- 35%	+/- 25%		+/- 50%	+/- 50%		+/- 50%
Weatherability	Good	Good	Good		Excellent	Excellent		
Paintable	•	•	•	•	•	•	•	•
UV Resistant	•	•	•		•	•		•
Mold/Mildew Resistance								
Low VOC (Per SCAQMD rule 1168)					•	•	•	•
Miami Dade Approval	•							
SWRI Validation	•					•		
SUBSTRATES								
Aluminum	•	•	•		•	•	•	•
Vinyl					•	•	•	•
Wood	•	•	•	•	•	•	•	•
Concrete	•	•	•	•	•	•	•	
Brick/Masonry	•	•	•	•	•	•	•	
Glass								
Fiber Cement					•	•	•	•
Steel	•	•	•		•	•	•	•
Asphalt Shingles						•		•
Composite Panels					•	•		•
APPLICATIONS								
Window & Door Installation	•	•	•		•	•		•
Siding Joints					•	•		•
Roofing & Flashing					•	•		•
Gutters and Narrow Seams								
Expansion Joints	•	•	•		•	•		•
Interior Trim					•	•		•
Exterior Trim	•	•	•		•	•	•	•
Flooring	•	•		•				•
Kitchen / Bathroom					•	•	•	•
Curtain Wall / Glazing								
Dryscape				•			•	



GET TAILORED TECHNICAL SUPPORT FROM PROS WHO KNOW YOUR WORLD.

Our customers are the center of our world, and we're here to help you navigate our installation systems from start to finish. Our team of technical experts offers personalized, project-specific guidance rooted in real jobsite knowledge, so you can move forward with confidence.



Contact technical support

Contact our technical team for support, information and recommendations.



FAQ, specifications and warranties

Find answers to the most frequently asked questions about our products.



Digital tools

Access calculators, step-by-step product selection and more.

USA Customer Service Phone:

1-800-726-7845

Mail Correspondence:

Bostik, Inc.
11320 W. Watertown Plank Rd.
Wauwatosa, WI 53226 USA



SURFACE PREPARATION

HARDWOOD

RESILIENT FLOORING

TILE AND STONE

SEALING AND BONDING

SUPPORT SERVICES

BUILD YOUR KNOWLEDGE WITH HELP FROM BOSTIK.

We're committed to helping pros stay sharp, skilled, and informed, offering a variety of online and offline resources to help you and your crew stay ready for whatever the jobsite throws your way. Led by our technical experts, Bostik provides the training you need to build smarter.

> In-person education

Learn about our products, their application, and our latest innovations, with hands-on training delivered by our expert technical team.

> Online training

Enhance your knowledge with interactive, on-demand content through our Bostik Academy: offering the support you need to confidently complete any project.

> Continuing education

Explore architectural and design courses with the opportunity to earn AIA/CEU Learning Units and advance your skills.

> Product information

Use the Bostik Pro app to easily find the right solutions for your next project—complete with product specs and technical data.



EXPLORE
BOSTIK ACADEMY



ENABLING SUSTAINABILITY IN YOUR WORLD

High-performance, low-impact adhesives are a key ally in the transition of industry and society to sustainable and circular models. As a global leader, Bostik has embarked on an ambitious transformation in line with Arkema's environmental roadmap, taking bold, science-based, third-party-verified actions to minimize our impact and move toward net zero by 2050. Through responsible manufacturing, innovative solutions and trustworthy collaboration with our stakeholders, we aim to drive real and measurable change in the adhesives industry.

LEARN
MORE




Leveraging our expertise and global reach, we at Bostik stand ready to enable the positive change you want to see in your world.

DID YOU KNOW?

Our roadmap toward net zero 2050

To accelerate our decarbonization, we have set ambitious 2030 targets for Scope 1, 2 and 3 emissions in line with Arkema's SBTi-validated roadmap and are taking measurable action now to transition toward net zero by 2050.

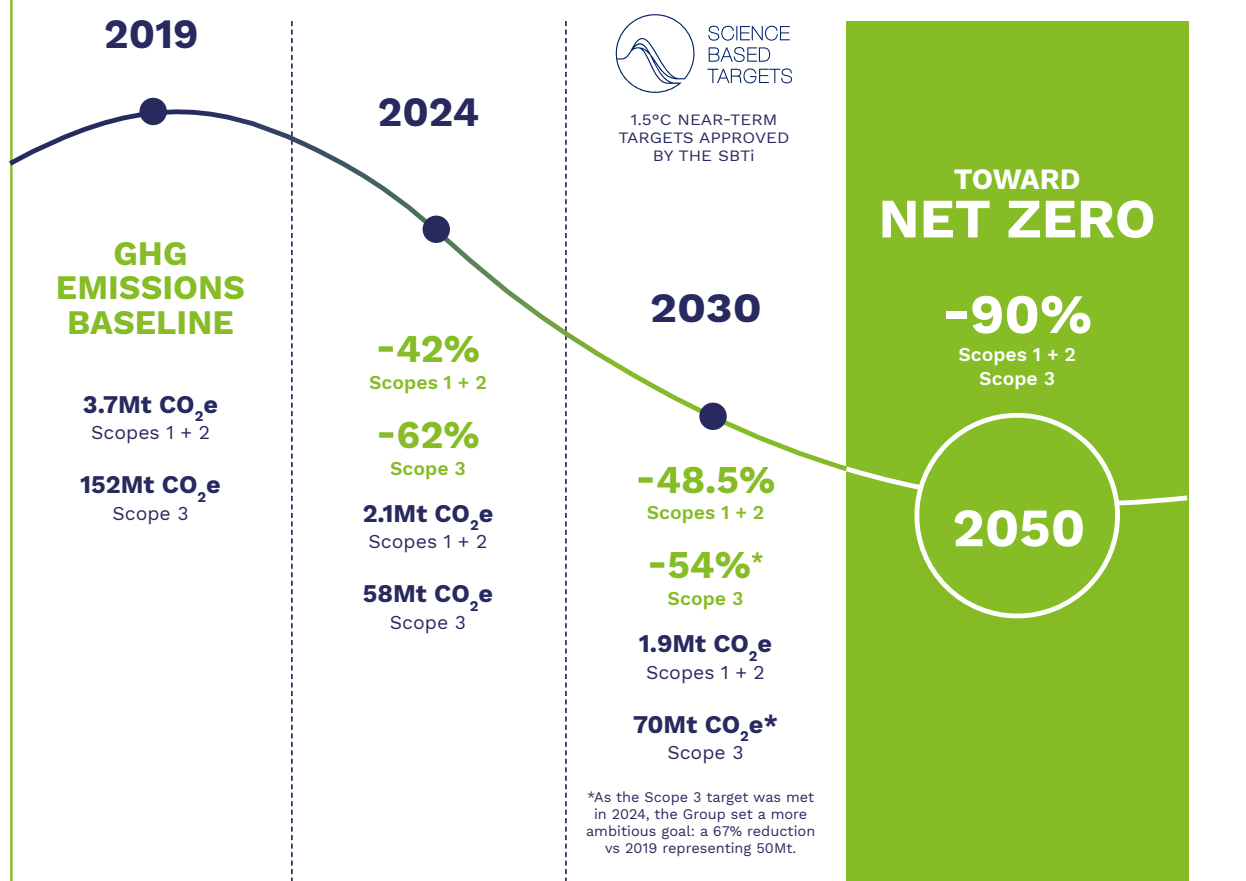


RESPONSIBLE MANUFACTURING

Transforming our operations through the entire value chain.

Bostik is transforming its business and value chain to reduce our impact. With ambitious, measurable targets to reduce energy and resource consumption set for 2030, we are advancing our sustainability goals to power yours.

OUR 2030 TARGETS*

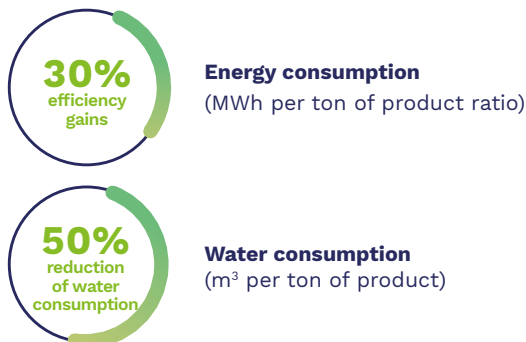

TRUSTWORTHY COLLABORATION

Working as long-term partners to solve collective challenges.

There are no lone heroes in the fight against climate change. That is why we collaborate with all our partners in a spirit of trust and transparency, so everyone can make informed decisions and drive the positive change they want to see in the world. We believe that open dialogue and close collaboration between all our stakeholders are key to making clear progress in our mutual sustainability efforts.

OUR FACTS AND FIGURES*




INNOVATIVE SOLUTIONS

Empowering customers with high-performance lower-impact solutions.

High-performance adhesives can unlock positive, durable change in many industries. Our sustainability roadmap drives us to innovate with purpose, analyzing the entire life cycle of our products, prioritizing the use of bio-based and recycled materials in our products and packaging, developing solutions with a lower carbon footprint, and minimizing volatile organic compound emissions.

OUR 2030 TARGETS*

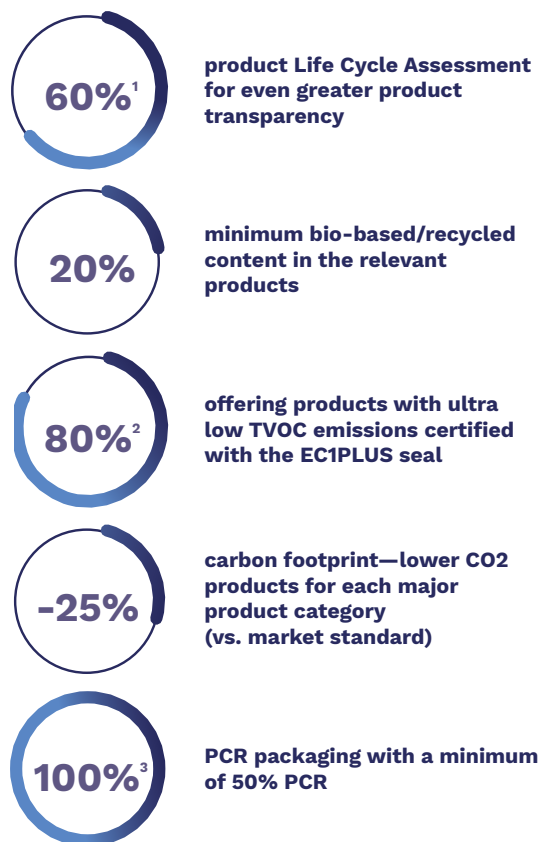

1: in % of sales

2: European scope

3: European scope (in % of sales)

*Arkema Group data. Targets compared with 2020 levels



ATTACHED TO YOUR WORLD

Bostik Inc.

11320 W. Watertown Plank Road
Wauwatosa, WI 53226
(+1) 800-726-7845
(+1) 414-774-2250

www.bostik.com

Adhesive solutions by **ARKEMA**